





PTC is based on a Wabtec Interoperable Electronic Train Management System (I-ETMS).

The simulator sessions were not strictly controlled experimental sessions, but they primarily served as data gathering sessions. Further, the research team was unable to identify an engineer with extensive experience using both I-ETMS and TO.

### OBJECTIVES

The purpose of conducting this research was to qualitatively assess whether there was a potential for human error during train operation using TO and PTC systems. If so, then to define what types of errors may be prominent (see Figure 2).

Error	TO in Use	PTC in Use	Workload
Failure to respond to the automation request	Yes: TO in automated mode	No	High
Failure to stop at a "stop and protect" grade crossing	Available – but set in manual mode	No	High
Large (40%) overspeed	Available – but set in manual mode	No	Low

Figure 2. Characteristics of the Error-Producing Conditions

### METHODS

The research team spent 4 days at FRA's CTIL at the Volpe National Transportation Systems Center in Cambridge, MA, developing, testing, and running scenarios.

The development process occurred as follows:

*Day 1* – A 17-mile section of track CGI from the CTIL's existing database was selected for use representing an actual rail line in the Midwestern part of the United States. Six events or scenarios were programmed for presentation to participants: permanent speed restriction, quiet zone, prompt for track information, work zone, temporary speed restriction, and stop and protect. Scenarios were designed to be presented in manual operation, simple (low workload), complex (high workload), and complex PTC and TO conditions.

*Day 2* – The scenarios were tested and refined.

*Day 3* – The first six sessions were conducted with the two engineers from RR1.

*Day 4* – The last four sessions were run with the engineer from RR2.

All scenarios ran approximately 25–30 minutes, and engineers were responsible for manually sounding the horn at rail grade crossings.

Figure 3 shows a graphical timeline representation of the simple scenario and the complex scenario.

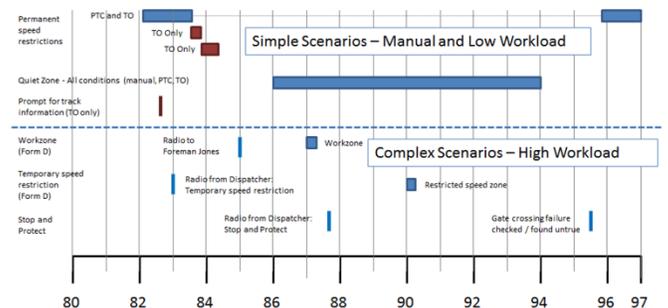


Figure 3. Timeline Representation of the Simulator Scenarios, Including Tasks and Events

### RESULTS

During the 10 sessions in the simulator, 3 errors related to train control and automation were observed:

1. Overlooking the TO request for track information, and failure to notice the eventual switch to manual mode which TO implemented
2. Failure to stop the train before the grade crossing at milepost 95.5 (i.e., the stop and protect)
3. Speed restriction violations, one of which can be classified as a major violation



Error	Human Error Probability	Workload	N-SEEV	Fault Tree Analyses	Automation
Failure to respond to the automation request	HEP = 0.011; Confirm automation enabled/disabled	Yes – high workload due to concurrent communication	Yes	Not evaluated	Automation presented the request, but it can do so in a more salient manner
Failure to stop at a “stop and protect” grade crossing	Not evaluated	No, workload was not high when this error occurred	The information was not presented – thus, it was not salient, and could be missed	P = 0.034	PTC was not engaged, and the TO was not programmed to include this.
Large (40%) overspeed	HEP = 0.010 (Determine and Evaluate Speed)	No	Not salient	P = 0.042	PTC would prevent this if it had been engaged. TO was programmed to include the correct speed, but it was in manual mode. The information could be more salient.

**Figure 4. The Prediction of Errors in These Analyses**

This research suggests that PTC and TO offer additional opportunities to support freight rail safety and enhance the efficiency of freight rail operations, but there is also potential for new opportunities for error (see [Figure 4](#)).

Of the three error types, the first and third (i.e., lack of response to the automation request and large overspeed) are fully consistent with the models that predicted them to be plausible. The ability to predict errors is particularly important, considering the multiple opportunities for the error to occur during all the simulation runs (e.g., multiple TO mode changes, multiple grade crossings, multiple speed restrictions). Thus, there are benefits to using the convergent error prediction techniques.

## CONCLUSIONS

Based on the analyses in this research, the team suggested several mitigation strategies, such as including additional methods to check that data has been correctly entered; providing technology that can sense maintenance personnel on the track and the system could inform personnel or equipment on the track; allowing the conductor to make programming changes if information has not been entered into PTC and the TO; encourage the engineer and the conductor to review the train and trip information prior to starting a trip for PTC and

TO purposes; increasing the visibility of presented information on the TO; and duplicating the PTC and TO displays at the conductor’s workstation.

Researchers found that further training could benefit engineers, conductors, and dispatchers. Training should cover known automation concerns (e.g., the TO switching to manual mode without the engineer being aware of it). The training simulators should include situations where engineers experience automation failures (Sauer, J., Chavallaz, A., & Wastell, D., 2015) (Wickens, C. D., Clegg, B. A., et al., 2015).

## FUTURE ACTION

The research team recommends future investigations into the timing of automation transitions. An examination of possible propagation of errors through the system with increased use of automation should occur. There should be additional investigations on the benefits of a conductor noticing and warning the engineer about potential errors. Future investigators should examine the lack of salience regarding an overspeed indication in the TO when the TO is running in manual. Lastly, there should be an investigation regarding PTC switching off without the engineer’s or conductor’s awareness; further studies in the CTIL could investigate these issues.

## REFERENCES

Card, S. K., Moran, T. P., & Newell, A. (1980). [The keystroke-level model for user performance time with interactive systems](#). *Communications of the ACM*, 23(7), 396–410.

Law, A. M. (2014). *Simulation Modeling and Analysis (5th Edition)*. New York, NY: McGraw-Hill Education.

Plott, C. (2011). *Cab Technology Integration Lab: Human performance modeling technical report*. Contract No. DTFR53-10-C-00011, Boulder, CO: Alion Science and Technology.



- Sauer, J., Chavaillaz, A., & Wastell, D. (2015). Experience of automation failures in training: effects on trust, automation bias, complacency, and performance. *Ergonomics*, 59(6), 1–28.
- Swain, A. D., & Guttman, H. E. (1983). *Handbook of Human Reliability Analysis with Emphasis on Nuclear Power Plant Applications: Final Report*. Report No. NUREG/CR-1278 SAND80-0200, Albuquerque, NM: Sandia National Laboratories.
- Wickens, C. D. (2015). 37 - Noticing Events in Visual Workplace: The SEEV and NSEEV Models. In R. R. Hoffman, P. A. Hancock, M. W. Scerbo, R. Parasuraman, & J. L. Szalma (Eds.), *The Cambridge Handbook of Applied Perception Research* (pp. 749–768). Cambridge, MA: Cambridge University Press.
- Wickens, C. D., Clegg, B. A., et al. (2015). Complacency and Automation Bias in the Use of Imperfect Automation. *Human Factors: The Journal of the Human Factors and Ergonomics Society*, 57(5), 728–739.

## CONTACTS

### Michael Jones

Engineering Psychologist  
Federal Railroad Administration  
Office of Research, Development and  
Technology  
1200 New Jersey Avenue, SE  
Washington, DC 20590  
(202) 493-6106  
[Michael.E.Jones@dot.gov](mailto:Michael.E.Jones@dot.gov)

## KEYWORDS

Automation, Positive Train Control, PTC, Trip Optimizer, TO, Cab Technology Integration Laboratory, CTIL, human error, human factors

## CONTRACT NUMBER

DTFR5314C00010

*Notice and Disclaimer: This document is disseminated under the sponsorship of the United States Department of Transportation in the interest of information exchange. Any opinions, findings and conclusions, or recommendations expressed in this material do not necessarily reflect the views or policies of the United States Government, nor does mention of trade names, commercial products, or organizations imply endorsement by the United States Government. The United States Government assumes no liability for the content or use of the material contained in this document.*